

5814E**

4.8 (.187) TYPE SERIES · FLAGS



Specification	Low insertion
Typology	With Upper Dimple
For male (mm)	4,8x0,8
Wire size mm² (AWG)	0,5-1,5 (20-16)
Ø Insulation (mm)	2,5 Max

Materials, temperature and contact resistance

Part nr.	Material	Finishing	Max. Temp. (°C)
5814E00	Brass	Natural	110
5814E01	Brass	Pre-tin-plated	120
5814E02	Brass	Tin plated	120
5814E24	Steel	Nickel-plated	300
5814E30	Bronze	Natural	120
5814E31	Bronze	Pre-tin-plated	130
5814E32	Bronze	Tin plated	130

Material thickness (mm) 0,35

Max. rated current

Wire section	5814E00 / 01 / 02 / 24 / 30 / 31 / 32
0.50 mm ²	8A
0.75 mm ²	10A
1.00 mm ²	12A
1.50 mm ²	16A

Insertion / Withdrawal forces

	5814E00 / 01 / 02 / 24 / 30 / 31 / 32
1st Insertion (max)	25N ¹
1st Withdrawal (max)	50N ¹
1st Withdrawal (min)	22N ¹
6th Withdrawal (min)	13N ¹

¹ Valid for Natural Brass Tab

Winding number 5000


Compatible connectors 24833**

Approvals


5814E** 4.8 (.187) TYPE SERIES · FLAGS



Drawing

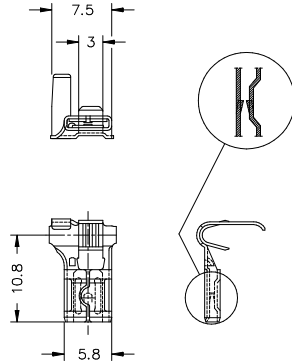

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publised only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us

Rev. Nr.	Concept	Date	Created/Revised	Approved
A2	Change company name and logo	2021-10-21	E. Roura (Laboratory Dept.)	D. Yabar (Engineering Dept.)
A1	Datasheet created automatically [A1]	2021-05-03	E. Roura (Laboratory Dept.)	D. Yabar (Engineering Dept.)

Escubedo Connection Systems, S.A.U. · Ctra. de Girona-Olot Km. 35,5 · 17843 Riudellots de la Creu · Girona · Spain
Tel.: 34 972 171 706 · Fax: +34 972 171 714 · info@escubedo.com · www.escubedo.com