

26314**

6,3 (.250) UP-TP SERIES - RECEPTACLE HOUSINGS



Description UP – TP receptacle housings - 1 way

Thermal characteristics

Part Number	Raw Material	Flammability Class (UL 94)	Glow Wire Flammability Index (IEC60695-2-12)	RTI Electrical (Max. Operating Temp.)	Glow Wire Test (GWT) (IEC60692-2-11)	UL Approvals / File
263141*	PA	V2	850°C @ 1.60mm	105°C @ 0.40mm	550°C	UL310 / E245592
263143*	PA	V0	960°C @ 0.80mm	140°C @ 0.40mm	650°C	UL310 / E245592
263144*	PA	V2	960°C @ 0.38mm	130°C @ 0.38mm	750°C	UL310 / E245592
263146*	PA	V0	960°C @ 0.45mm	120°C @ 0.40mm	750°C	UL310 / E245592

* Colour

Compatibility (Terminals supported)

Wire size (mm ²)	UP – TP receptacle
0.20 – 0.60	4833.**
0.50 – 1.00	4830.**
0.50 – 1.50	4831.**
1.00 – 2.50	4832.**
2.50 – 5.00	4834.**


Mechanical properties

Receptacle housing vs UP-TP receptacle

Part number	263141*	263143*	263144*	263146*
Insertion	15N Max.	15N Max.	15N Max.	15N Max.
Withdrawal (lock only)	90N Min.	50N Min.	50N Min.	(T.B.D.)

* Colour

Drawing

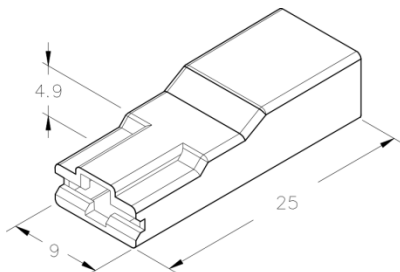

Approvals

UL310 / E245592	
-----------------	---

Note: (T.B.D) To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cablings, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicized only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us.

Rev. Nr.	Concept	Date	Created/Revised	Approved
4	Error typographic update	28/06/2017	D.Martinez/E.Roura	X.Menac
3	Thermal characteristics update	11/05/2017	D.Martinez/E.Roura	X.Menac
2	Update Format	05/07/2016	D.Martinez/E.Roura	X.Menac
1	Creation	31/05/2006	Marc Garangou	Luis Barea