

26330**

6,3 (.250) UP-STA FLAG SERIES - RECEPTACLE HOUSINGS



Description UP – Standard flag receptacle housing - 1 way. Middle opening

Thermal characteristics

Part Number	Raw Material	Flammability Class (UL 94)	Glow Wire Flammability Index (IEC60695-2-12)	RTI Electrical (Max. Operating Temp.)
263301*	PA66	V2	850°C	110°C
263303*	PA66/6	V0	960°C	140°C
263304*	PANF	NF	960°C	65°C


* Colour

Compatibility (Terminals supported)

Wire size (mm ²)	UP – Standard flag receptacle
0.5 – 1.0	5420.**
1.0 – 2.5	5422.**

Mechanical properties (T.B.D)

Drawing

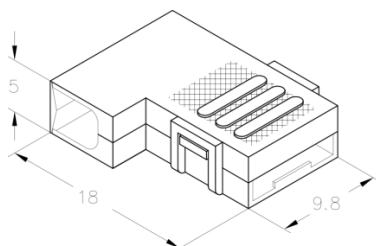

Note: (T.B.D) To be determined

Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicized only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us.

Rev. Nr.	Concept	Date	Created/Revised	Approved
2	Update Format	30/05/2016	D.Martinez/E.Roura	X.Menac
1	Creation	03/02/2009		