

26333**



6.3 (.250) UP-TP FLAG RECEPTACLE HOUSINGS

Description Flag receptacle housings for 6.3 TP flag series

Thermal characteristics

Part Number	Raw Material	Flammability Class	Glow wire flammability index (GWI)	Relative thermal index elec. (RTI)	Glow Wire Test (GWT)	UL approvals
		UL94	IEC60695-2-12	UL746	IEC60692-2-11	
263331*	PA	V2	825°C	65°C	-	UL310
263333*	PA	V0	960°C	140°C	-	UL310
263334*	PA	V2	960°C	130°C	750°C	UL310
263335*	PA	V2	-	150°C	-	-
263336*	PA	V0	960°C	130°C	-	-


Compatibility (Terminals supported)

Wire size (mm ²)	Receptacle
0.3 – 0.6	5820F**
0.5 – 1.5	5820.**
1.0 – 2.5	5822.**
1.5 – 3.0	5823.** (single wire)

Mechanical properties (Terminal-connector for way)

1 st Insertion	25 N Max.
1 st Withdrawal primary lock	40 N Min.
1 st Withdrawal primary + secondary	130 N Min.

Drawing

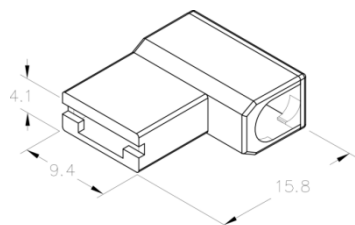

Approvals



Disclaimer

Data obtained from Escubedo Laboratory essays, using own methodology, cabling, equipment and original crimping tools, done in laboratory conditions and following the indicated standards, errors and omissions excepted. This document has no contractual meaning and it is publicized only for informative purposes. It can be changed without prior notice. The end customer has the sole responsibility to check these characteristics in its environment and with its own components, manufacturing methods and equipment. See also the full range product overview if available. For further information please visit our web site or contact us.

Rev. Nr.	Concept	Date	Created/Revised	Approved
6	Update document	06/02/2017	D.Martinez / Roura	X.Menac
5	Update document	04/09/2015	D.Martinez / Roura	D.Martinez
4	Update	23/01/2012	D.Martinez	A.Calvet